




Teslatron^{PT}

Integrated Cryofree[®]
superconducting
magnet system

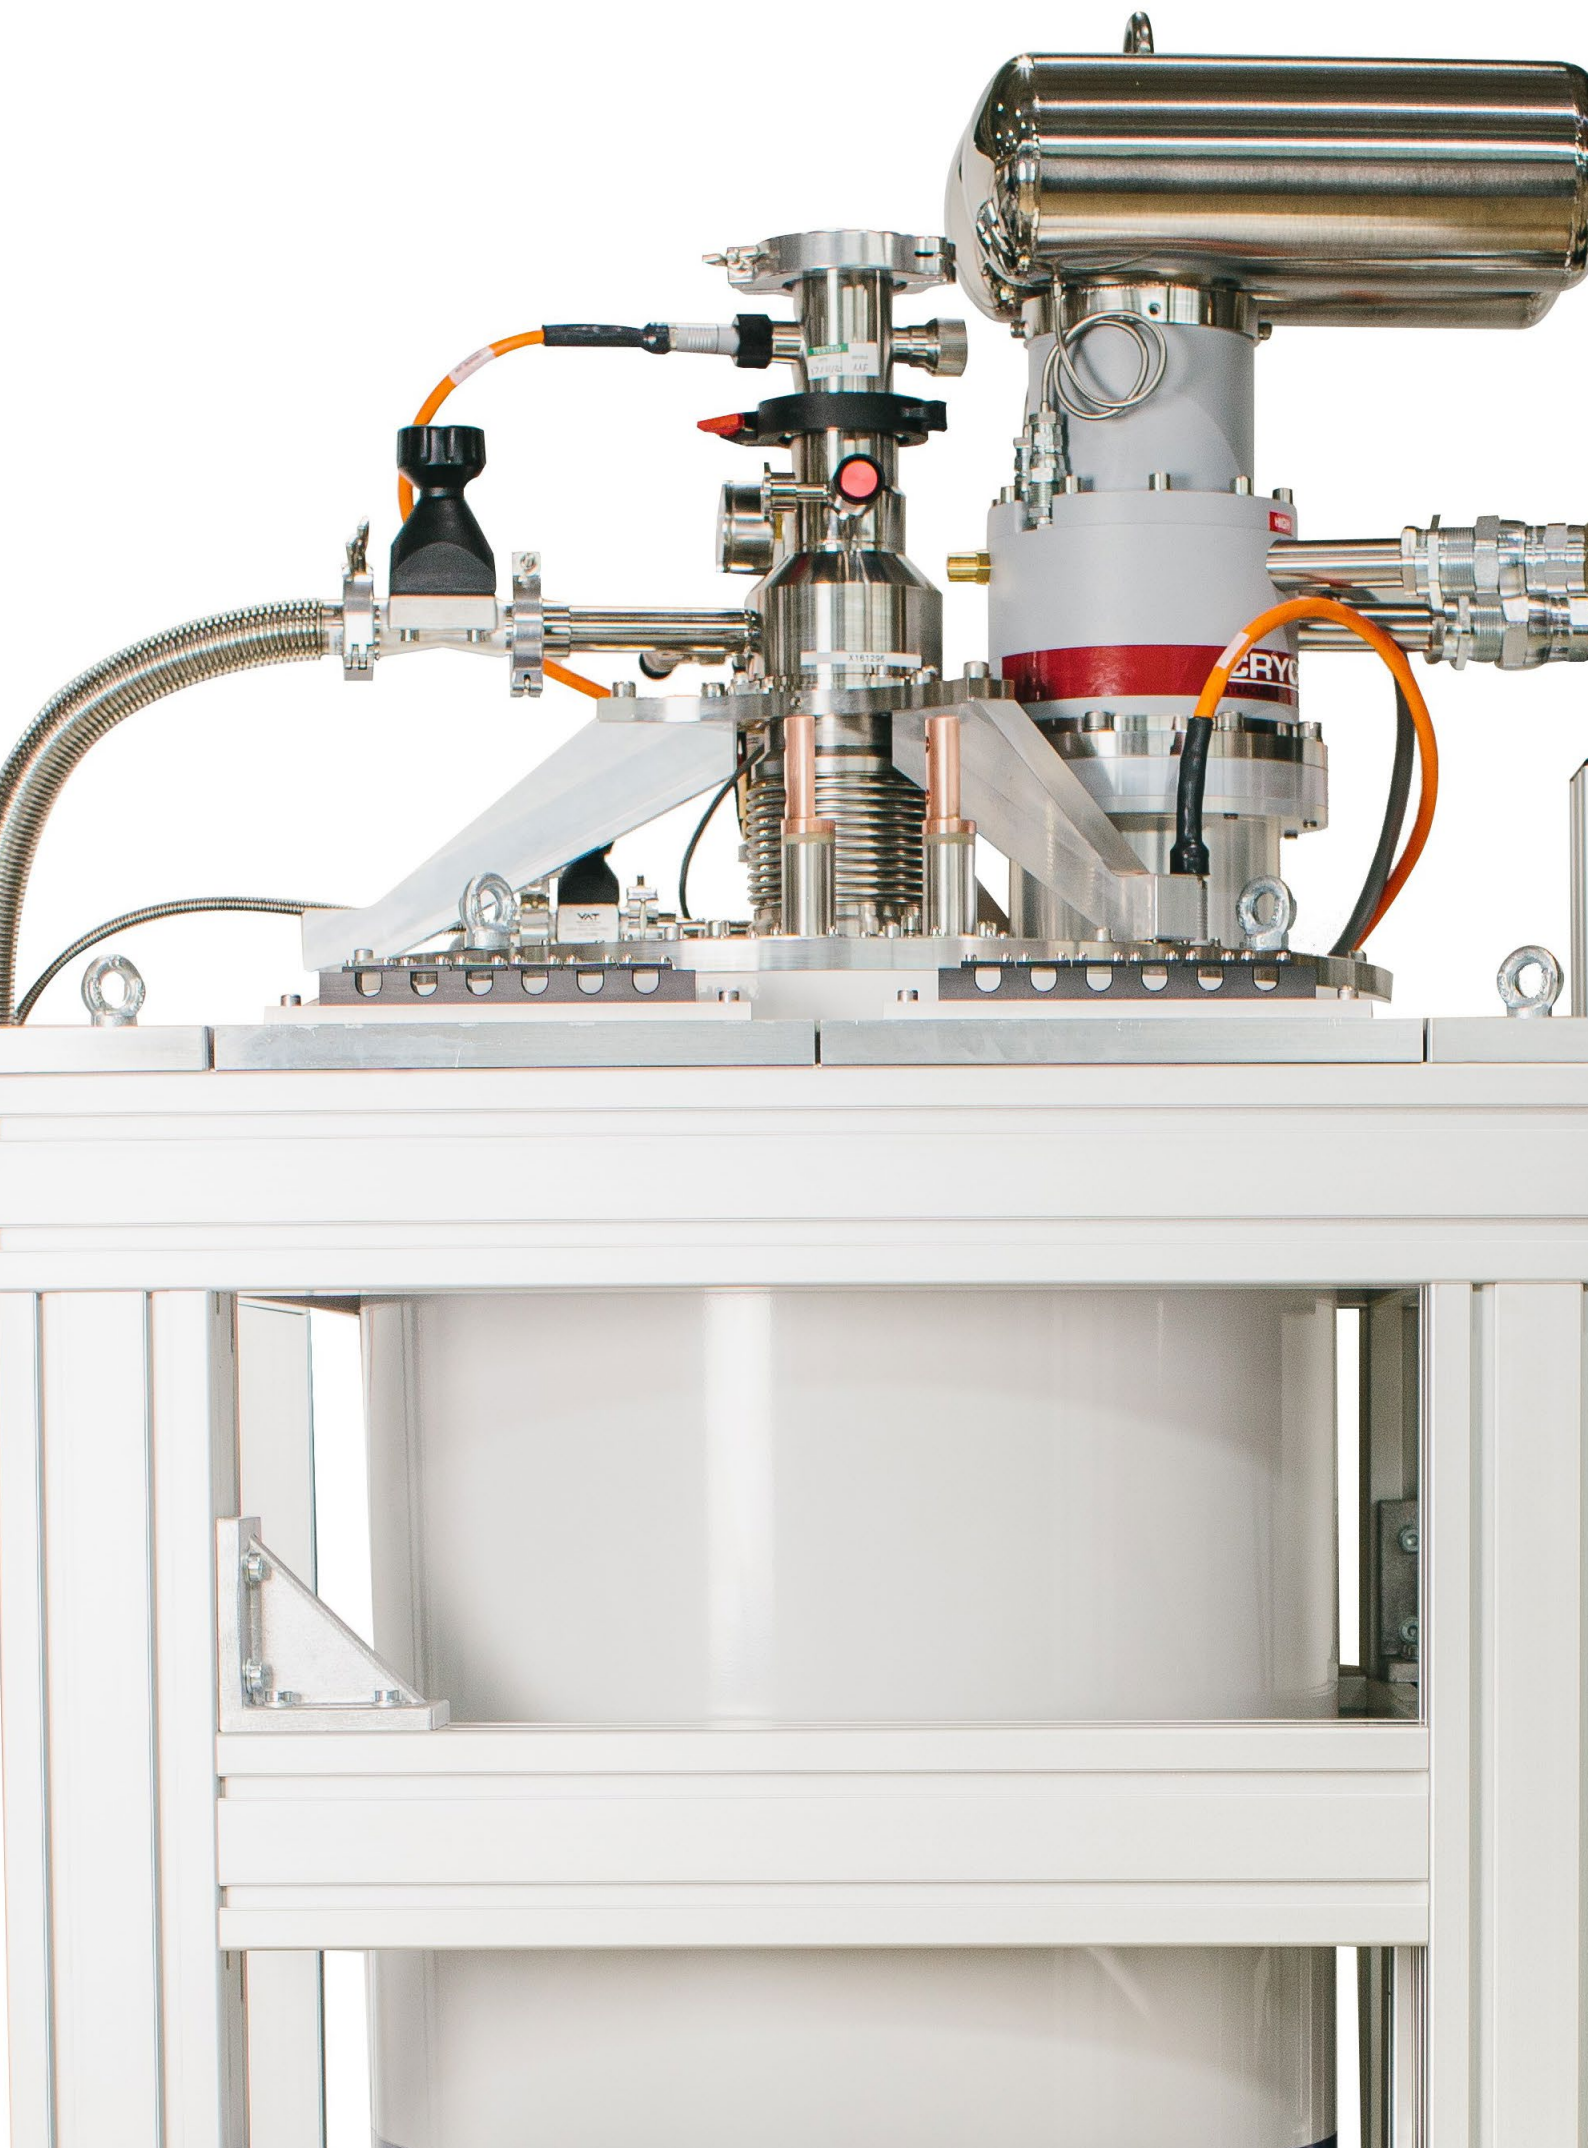

Applications

Electrical Transport Measurements

High magnetic fields and low temperatures for Hall effect and quantum Hall effect measurements.


Low Dimensional Physics

Investigate the effect of low temperature and high field on low dimensional materials; nanowires, nanotubes, quantum dots and 2D electron gases.


Spintronics

Spin processing and data storage studies using high magnetic fields and low temperatures.


Electrical Transport Measurements

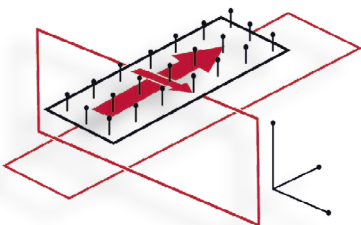


Low Dimensional Physics

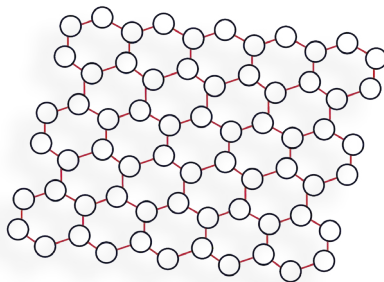

Spintronics

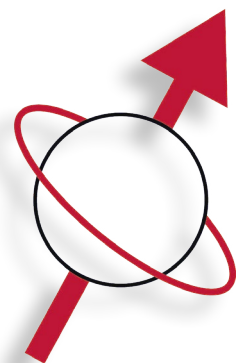

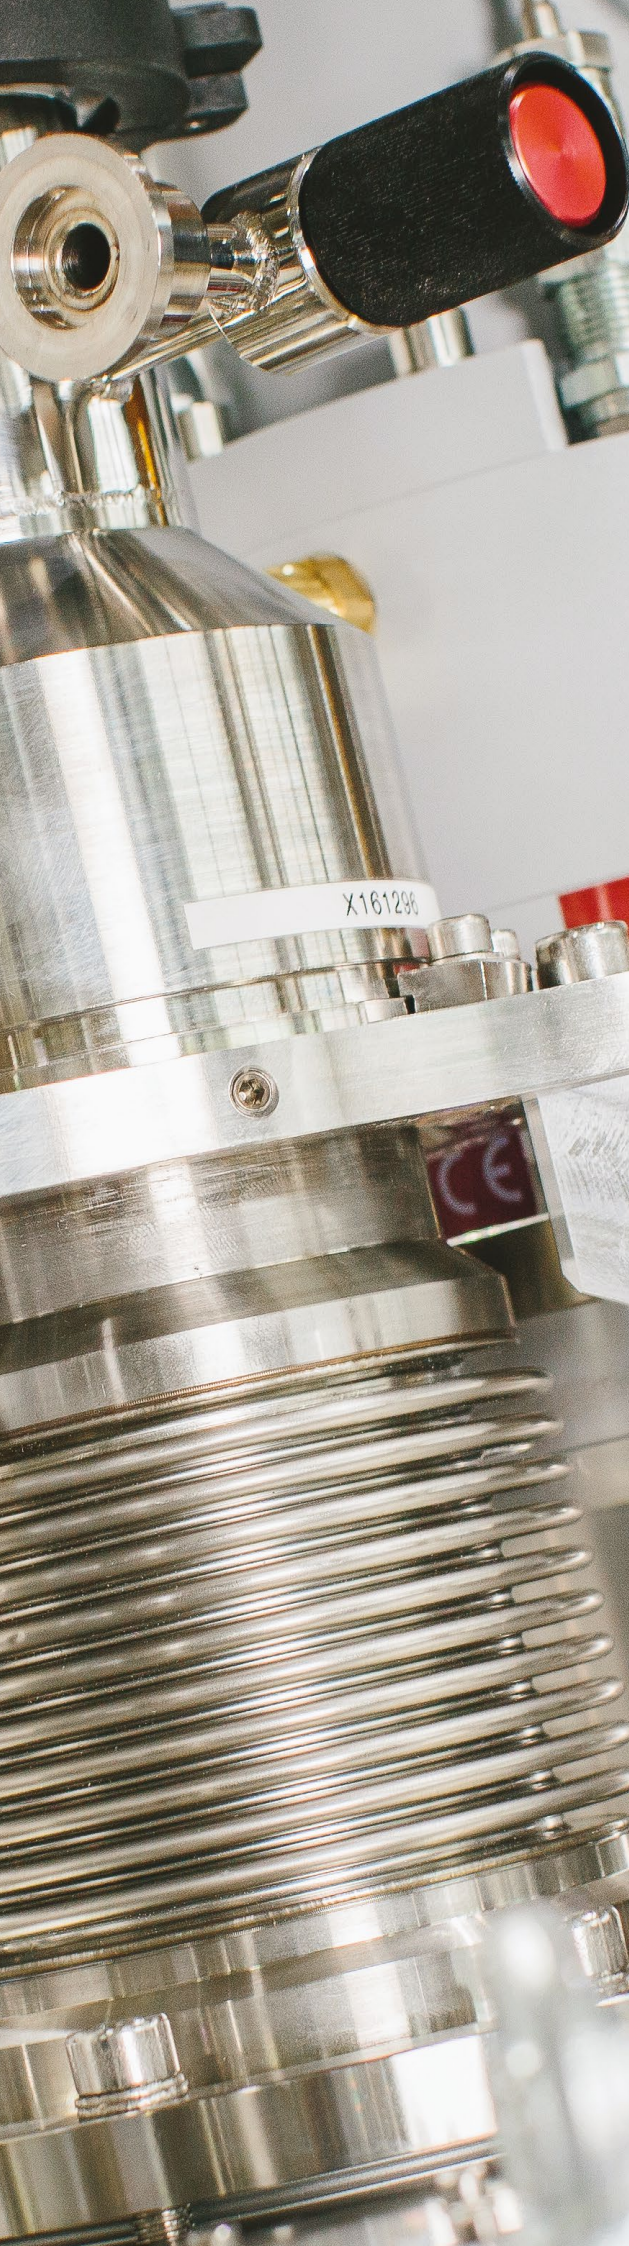

TeslatronPT Platform

Features / Benefits

- Large sample space
- Low temperature inserts available – down to 25 mK
- Low-noise, ESD protected measurement probes
- Integrated variable temperature insert with static exchange gas around the sample, providing sample temperatures between 1.5 and 300 K while operating the magnet
- Wide range of standard magnets with fields up to 14 T with vector magnet geometries available
- Fine filament Nb₃Sn superconducting wire offers the minimum field hysteresis via remnant field, and reduces flux jumping at low fields
- Intelligent control of cryogenic and magnetic environments with temperature controller and magnet power supply

Insert features and options:

- DC and RF wiring to the sample
- < 300 mK with the HelioxVT ^3He refrigerator
- < 25 mK with the cryogen free KelvinoxJT dilution refrigerator system
- LCC sample carriers with universal interface, easily demountable for quick sample exchange. Compatible with low temperature inserts





Key Specifications

Magnetic Field Options	8 T, 12 T, 14 T and 6/1/1 Vector Rotation
Sample Space Diameter	50 mm
Temperature Range	1.5 to 300 K
Temperature Stability	± 50 mK
Sample Cooldown	< 2 h from room temperature to < 2 K for basic probe loaded into cold VTI

Service Support

Our support to you

Because Quantum Design Oxford is unique in designing and manufacturing the complete system, we offer unrivalled support and expertise for your TeslatronPT system through our regional Customer Support teams backed by unmatched factory expertise.

Related Products



HelioxVT

This sample-in-vacuum ^3He refrigerator achieves less than 300 mK for more than 40 hrs or can provide 50 μW of cooling power at 350 mK for over 6 hrs. The HelioxVT uses a cold gas environment with a 50 mm access, therefore no need for a 1 K pot on the insert.



KelvinoxJT

The Kelvinox[®]JT is a small, dipstick-style, dilution refrigerator, which features a Joule-Thomson condensation stage. It means the KelvinoxJT can operate in any 4 K environment – wet or dry – as it does not rely on a 1 K pot.



Sample Protect

Protect sensitive samples from electrostatic discharge.

Quantum Design Oxford
Tubney Woods, Abingdon
Oxfordshire, OX13 5QX
United Kingdom

www.qd-oxford.com
info@qd-oxford.com

+44 1865 393200

All other trademarks acknowledged.
All rights reserved. Do not reproduce
without permission.

© Oxford NanoScience LTD trading
as Quantum Design Oxford 2026.